

SPECK PUMPS
Badu[®]Stream //
Package A

DELIVERING UP TO
400 GPM

Low profile housing fades
easily into any pool design.



Part# SS484-2400M-1Sw

WE BRING WATER TO LIFE![®]

See the BaduStream
in action at
www.badujet.com



Proudly Assembled
in the USA

For more information on our
BADU SwimJet Systems,
call **800.223.8538**
or visit www.badujet.com

SPECK X
pumps

Badu® Stream II

SwimJet System



With a BaduStream II SwimJet system there is something for everyone. This versatile swimjet system is available in several different packages to satisfy a variety of exercise styles and budgets. The BaduStream can be configured with one, two or three jets. Its compact low profile swimjets fit flush against your pool wall.



Features

- Patented flush mounted jet housing for minimum visibility.
- Anti-entrapment cover (8-1/4" x 8-1/4") provides undetectable suction. (Round or Square covers available)
- Adjust the flow with a simple turn of the jet nozzles, and quickly adapt to any swimmer's pace.
- Air regulator venturi allows for exhilarating white-water effect.
- Underwater LED push button with 100 ft. cable installs in a standard 1.5" return fitting, and allows for easy control from inside the pool.
- Control from outside the water with our intuitive BADUConnect App via WiFi.
- Utilizes the DOE Compliant SPECK Model Z1-80 5.0 THP SwimJet Pump.
- Requires a single phase, 40 amp service; does not require a motor starter.
- System includes nozzle adjustment tools to help set the jet nozzles in position for optimum performance.
- Optional pulsating massage hose that can be attached to jet nozzle.
- Optional winter cover kit.

Color Options



Round covers are available in black, gray and white.

Trademarks and Certifications



Complies with UL 1563
CSA C22.2 No. 218.1-M89
Swimming Pool Equipment
Listing #E212148



VGBA 2017

Installation Specifications


The BaduStream is normally incorporated into the design, but it can be added to any pool at a later date. The BaduStream has no protruding parts, ensuring pool users' safety. All BaduStream systems include an LED push button with 100' cable (mounts in all standard 1.5" return fitting), Speck controller, and Speck 5 THP pump. 4" or 6" plumbing is required, depending upon the package chosen.

- The BaduStream requires a clear unobstructed area within the swimming pool that is 8 ft wide x 15 ft long x 3 ft deep to work effectively.
- The BaduStream should be installed within 30 ft. of the pump with 4" pipe and minimal fittings for optimum performance. If the distance to the pump is greater than 30 ft., then 6" pipe should be used.

All BaduStreams are provided with installation instructions for various pool construction types: new and existing gunite or concrete pools, pools with liners, steel wall pools, and fiberglass pools.

Read all instructions before installing.

Consult your physician before attempting any strenuous exercise. This product may not be challenging or satisfying for all levels of exercise.

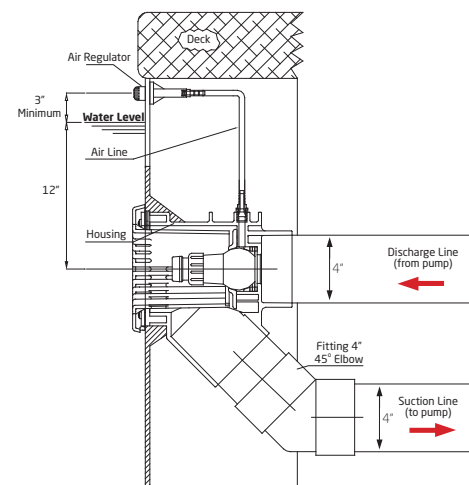

Side View

NOTE: Patented combined suction and discharge fitting does not require main drains.